









Data sheet 2MV 790

真空性能参数曲线图

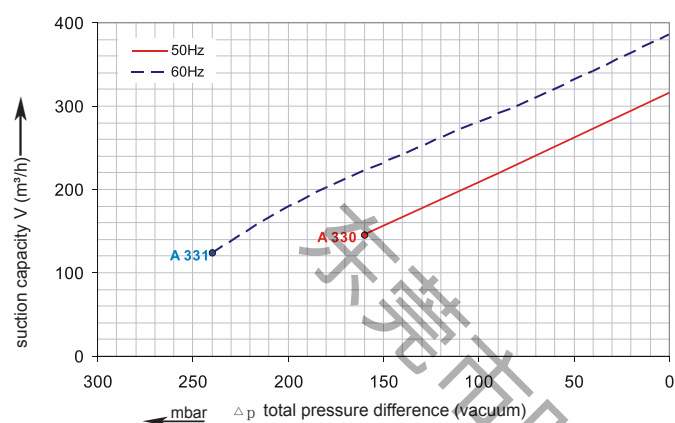

压缩性能参数曲线图

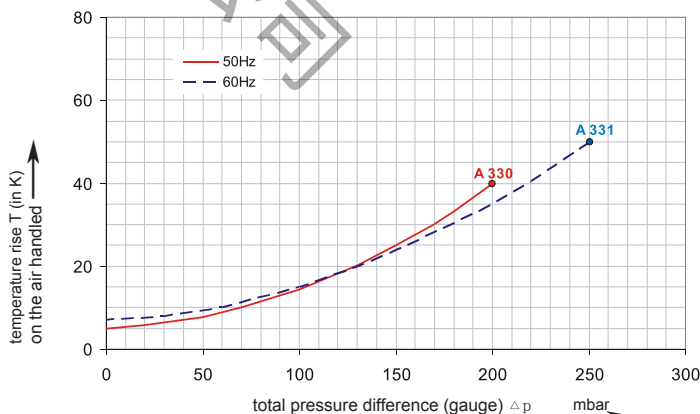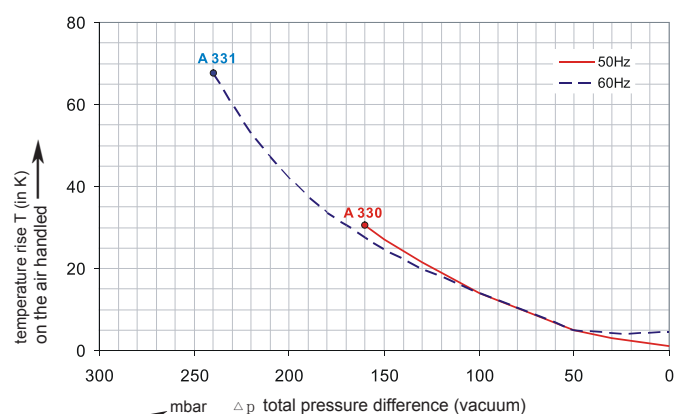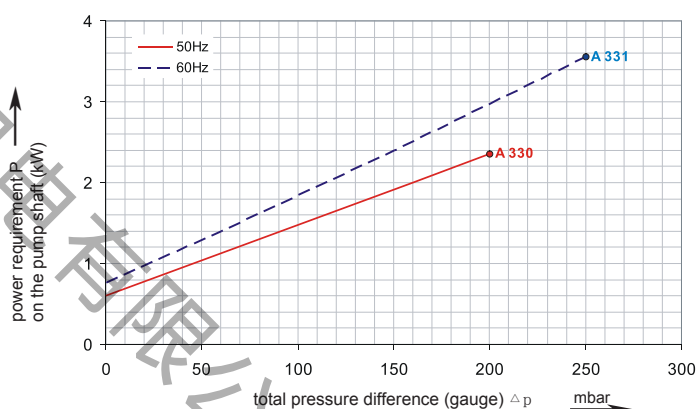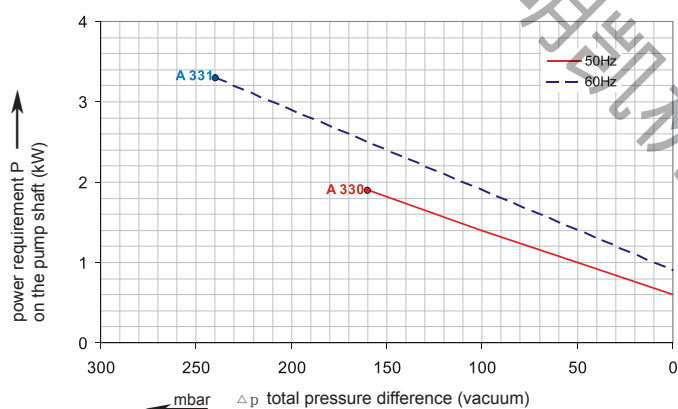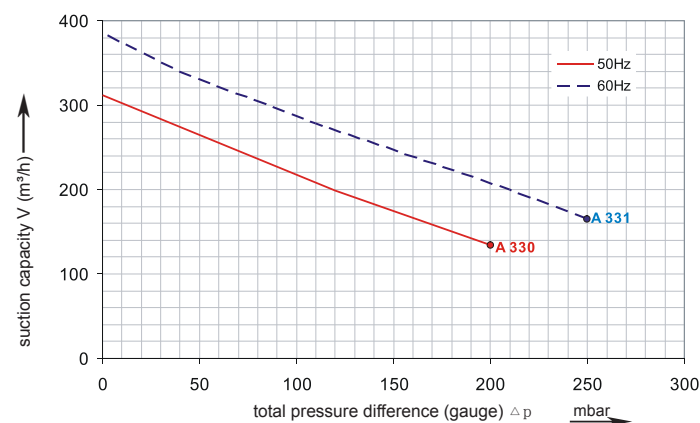

性能曲线基于温度为15°C、大气压为1013毫巴的空气，公差为+/- 10 %。总压差适用于最高25°C的吸入温度和环境温度。

每种2MV型都可以在规定的总性能曲线范围内作为真空泵和压缩机连续运行。

选型订购参数											
Type 2MV790											
Curve No.	Order No.	Fre-quency	Rated power	Input voltage		Input current		Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	kW					V	A		
3~ 50/60 Hz IP54 isulation material class F 1)											
A 330	2MV790-H26	50	2.2	200D ... 240D	345Y ... 415Y	12.5D	7.2Y	-160	200	69	36
A 331	2MV790-H26	60	3.45	220D ... 275D	380Y ... 480Y	12.6D	7.3Y	-240	250	72	36



Other voltage ranges			
2MV 790-H □.□			
50Hz	60Hz	↑ ↑	
3~			
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	H 1	
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	H 6	
345...415 V D	380...480 V D	H 7	
500 V D	575VD	C 5	
Further voltage range on request; please quote in plain text.			

电机是根据DIN EN 60 034 / DIN IEC 34-1和温度等级f设计的 对于三相电机 , 固定电压的公差为+/- 10 % , 电压范围的公差为+/- 5 %。

单相电机的设计公差为+/- 5 %。如果只有90 %的最大允许压力用于连续运行 , 那么允许电压范围增加到+/- 10 %。